

## Round-way Smart Air Flow Cassette

- AB072MRERA**
- AB162MRERA**
- AB092MRERA**
- AB182MRERA**
- AB122MRERA**
- AB242MRERA**




- Unique round-way air outlet, no blind spot
- Innovative 4 independent air flow control
- 6 adjustable louver positions, 1296 air flow combinations
- Move Eye intelligent system, intelligence all around(optional)



Model/Indoor unit		AB072MRERA	AB092MRERA	AB122MRERA	AB162MRERA	AB182MRERA	AB242MRERA	
Capacity	Cooling	kBtu/h	7.5	9.5	12.3	15.3	19.1	24.2
		kW	2.2	2.8	3.6	4.5	5.6	7.1
Capacity	Heating	Btu/h	8.5	10.9	13.6	17.1	21.5	27.3
		kW	2.5	3.2	4	5	6.3	8
Electrical Parameters	Power supply	Ph/V/Hz	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60
Performance	Air flow (H)	m³/h	1000	1000	1000	1000	1000	1380
	Sound pressure level(H/M/L)	dB(A)	30/27/25	30/27/25	30/27/25	32/29/27	33/30/29	35/34/31
Installation	External dimensions(W/D/H)	mm	840/840/183	840/840/183	840/840/183	840/840/183	840/840/183	840/840/204
	Shipping dimensions(W/D/H)	mm	983/983/268	983/983/268	983/983/268	983/983/268	983/983/268	983/983/290
	Net/Shipping weight	kg	28/31	28/31	28/31	28/31	28/31	29/32
	Refrigerant liquid pipe	mm	6.35	6.35	6.35	6.35	6.35	9.52
Installation	Refrigerant gas pipe	mm	9.52	9.52	12.7	12.7	12.7	15.88
	Model name		PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB
Panel	External dimensions(W/D/H)	mm	950/950/50	950/950/50	950/950/50	950/950/50	950/950/50	950/950/50
	Shipping dimensions(W/D/H)	mm	1013/1025/123	1013/1025/123	1013/1025/123	1013/1025/123	1013/1025/123	1013/1025/123
	Net/Shipping weight	kg	6.5/9	6.5/9	6.5/9	6.5/9	6.5/9	6.5/9
Controller	Wired (O-Optional/S-Standard)	/	YR-E17(S)	YR-E17(S)	YR-E17(S)	YR-E17(S)	YR-E17(S)	YR-E17(S)
	Infrared(O-Optional/S-Standard)	/	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)

## Round-way Smart Air Flow Cassette

- AB282MRERA**
- AB482MRERA**
- AB302MRERA**
- AB602MRERA**
- AB382MRERA**

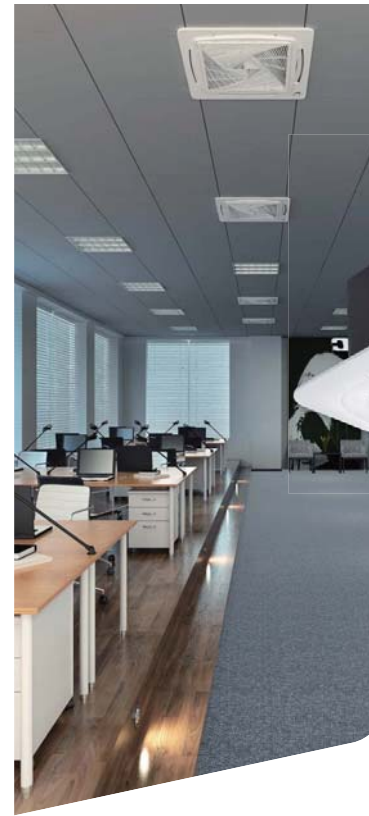

- Unique round-way air outlet, no blind spot
- Innovative 4 independent air flow control
- 6 adjustable louver positions, 1296 air flow combinations
- Move Eye intelligent system, intelligence all around(optional)



Model/Indoor unit		AB282MRERA	AB302MRERA	AB382MRERA	AB482MRERA	AB602MRERA	
Capacity	Cooling	kBtu/h	27.3	30.7	38.2	47.7	54.6
		kW	8	9	11.2	14	16
Capacity	Heating	Btu/h	30.7	34.1	42.6	54.6	61.2
		kW	9	10	12.5	16	18
Electrical Parameters	Power supply	Ph/V/Hz	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60
Performance	Air flow (H)	m³/h	1380	2050	2050	2100	2100
	Sound pressure level(H/M/L)	dB(A)	37/35/31	37/35/31	37/35/31	44/40/36	44/40/36
Installation	External dimensions(W/D/H)	mm	840/840/204	840/840/246	840/840/246	840/840/288	840/840/288
	Shipping dimensions(W/D/H)	mm	983/983/290	983/983/331	983/983/331	983/983/373	983/983/373
	Net/Shipping weight	kg	29/32	34/37	34/37	35/38	35/38
	Refrigerant liquid pipe	mm	9.52	9.52	9.52	9.52	9.52
Installation	Refrigerant gas pipe	mm	15.88	15.88	15.88	15.88	15.88
	Model name		PB-950KB	PB-950KB	PB-950KB	PB-950KB	PB-950KB
Panel	External dimensions(W/D/H)	mm	950/950/50	950/950/50	950/950/50	950/950/50	950/950/50
	Shipping dimensions(W/D/H)	mm	1013/1025/123	1013/1025/123	1013/1025/123	1013/1025/123	1013/1025/123
	Net/Shipping weight	kg	6.5/9	6.5/9	6.5/9	6.5/9	6.5/9
Controller	Wired (O-Optional/S-Standard)	/	YR-E17(S)	YR-E17(S)	YR-E17(S)	YR-E17(S)	YR-E17(S)
	Infrared(O-Optional/S-Standard)	/	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)	YR-HBS01(O)