


• Be Controlled with Other Indoor Units Together

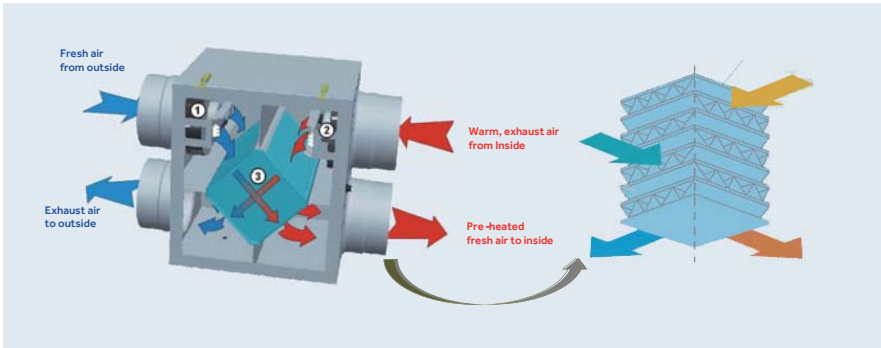

• Efficient Heat Recovery Air Processing

• Heat Recovery Media Element

• 4 Models Ranging From 150cm/h to 1000cm/h

ERV0150ANN    ERV0800ANN  
ERV0260ANN    ERV1000ANN



STANDARD FUNCTION

-   
Clean air
-   
O<sub>2</sub>-refresh
-   
Central control
-   
Auto restart
-   
3 minutes protection
-   
24 hours timer

Model/Indoor unit		ERV0150ANN	ERV0260ANN	ERV0800ANN	ERV1000ANN	
Electrical	Power supply	Ph/V/Hz	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60	1/220-230/50/60
	Rated power input	kW	0.1	0.12	0.36	0.36
Performance	Rated current	A	0.55	0.55	1.65	1.65
	Air flow (H)	m <sup>3</sup> /h	150	260	800	1000
	Sound pressure level(H/L)	dB(A)	44/43	44/43	57/55	57/55
	Sound power level(H/L)	dB(A)	55/54	55/54	68/66	68/66
Installation	External dimensions(W/D/H)	mm	940/685/276	940/685/276	1227/1115/387	1227/1115/387
	Shipping dimensions(W/D/H)	mm	1013/773/345	1013/773/345	1465/1213/430	1465/1213/430
	Net/Shipping weight	kg	28.7/31.2	28.7/31.2	85.5/90.6	85.5/90.6
	Static Pressure	Pa	80	60	120	100
Controller	Wired (O-Optional/S-Standard)	/	YR-N07(S)	YR-N07(S)	YR-N07(S)	YR-N07(S)
	Infrared(O-Optional/S-Standard)	/	/	/	/	/